


R&K-PD110-1S



OUTLINE DRAWING

※IN MILLIMETERS

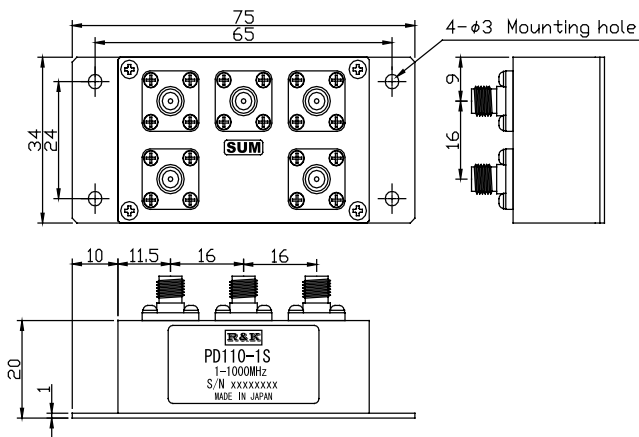

- Frequency Range : 1 ~ 1000MHz
- 4Way-0°
- Low Cost
- RoHS Compliance

SPECIFICATIONS

| | |
|------------------------|---|
| Frequency Range | : 1 - 1000MHz |
| Insertion Loss | : 2.5dB (max.) (Except Theoretical Loss 6.0dB) |
| Amplitude Balance | : 0.6dB (max.) |
| Isolation | : 17dB (min.) |
| Phase Balance | : 5° (max.) |
| Phase Difference | : 0° |
| Between Output Ports | |
| VSWR (SUM) | : 1.5:1 (max.) |
| VSWR (Other) | : 1.6:1 (max.) |
| Impedance | : 50Ω |
| Maximum RF Input Power | : 1W (1.2:1 Load VSWR) |
| Operating Temperature | : -40°C to + 85°C |
| Storage Temperature | : -40°C to +100°C |
| Connectors (Standard) | : SMA-FEMALE |
| Connectors (Option) | : BNC-FEMALE |
| Weight (SMA Connector) | : 85g (typ.) |



NOTE: All RF Ports are DC short to GND.

HOW TO ORDER





Model Name R&K-PD110-1S

S = SMA - FEMALE
B = BNC - FEMALE

TYPICAL PERFORMANCE (Temp @+25°C)

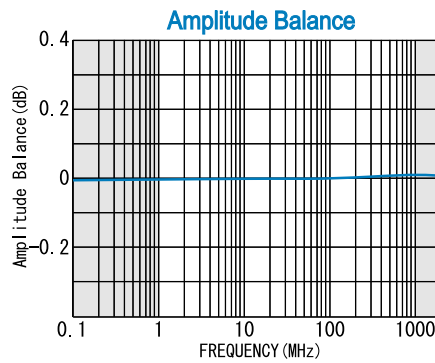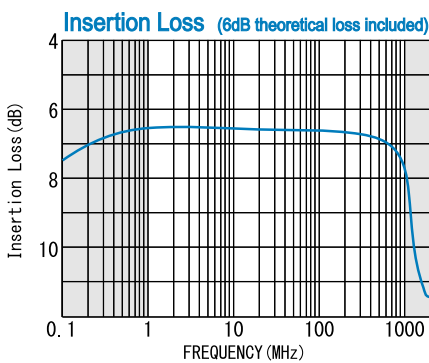

SCHEMATIC

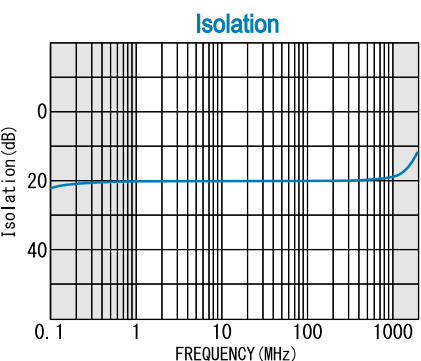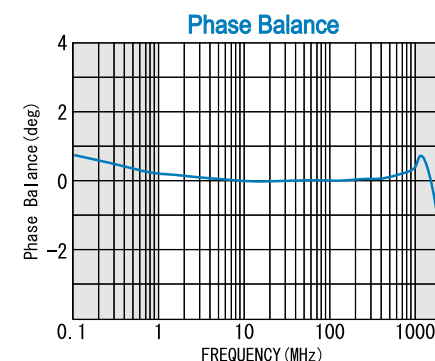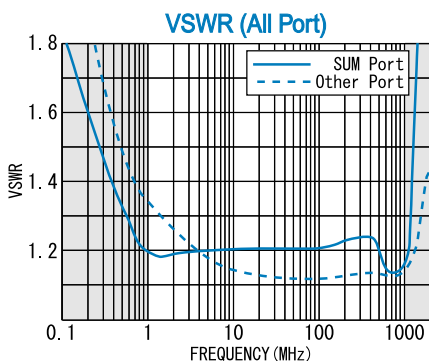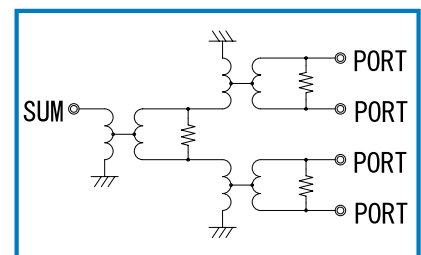

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
Tel: +81-545-31-2600 E-mail: info@rkco.jp
Fax: +81-545-31-1600 URL: http://rk-microwave.com