



## R&K-PD630-0S

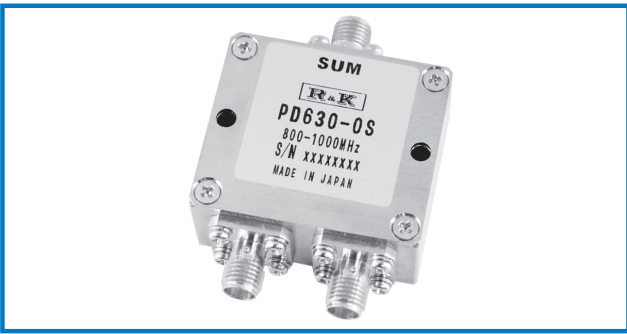

### OUTLINE DRAWING

※IN MILLIMETERS

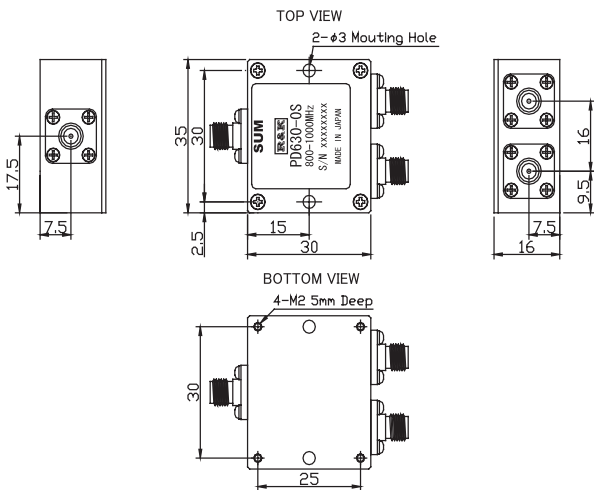

- Frequency Range : 800MHz~1000MHz
- 2way-0°
- Wilkinson Type
- Low Cost
- RoHS Compliance

### SPECIFICATIONS @ +25°C

Frequency Range	: 800MHz ~ 1000MHz
Insertion Loss (Except Theoretical Loss 3.0dB)	: 0.5dB (max.)
Amplitude Balance	: 0.2dB (max.)
Isolation	: 20.0dB (min.)
Phase Balance	: 2° (max.)
Phase Difference Between Output Ports	: 0°
VSWR (SUM)	: 1.3:1 (max.)
VSWR (Other)	: 1.3:1 (max.)
Impedance	: 50 Ω
Maximum RF Input Power	: 1W (1.2:1 Load VSWR)
Operating Temperature	: -40°C to +85°C
Storage Temperature	: -40°C to +100°C
Connectors	: SMA-FEMALE BNC-FEMALE
Weight	: 45g (typ.)


### HOW TO ORDER

Model Name  
R&K-PD630-0S


S = SMA - FEMALE  
B = BNC - FEMALE

### TYPICAL PERFORMANCE (Temp @+25°C)


#### Insertion Loss (3dB theoretical Loss included)

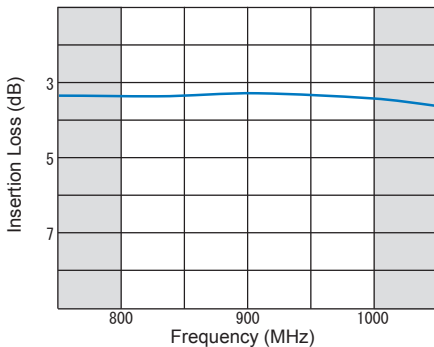


#### Amplitude Balance

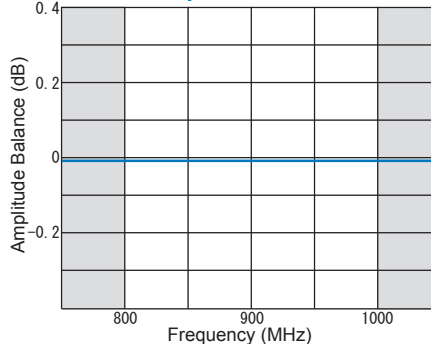


#### SCHEMATIC

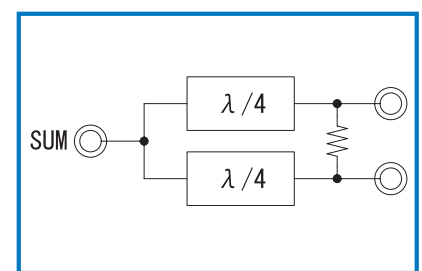


#### VSWR (All Port)

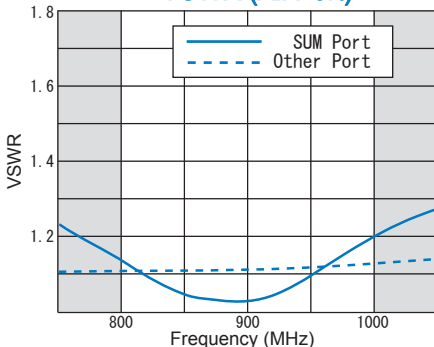

#### Phase Balance

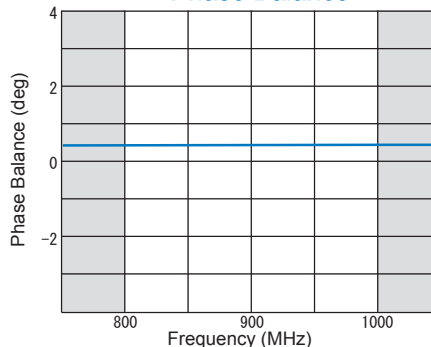

#### Isolation

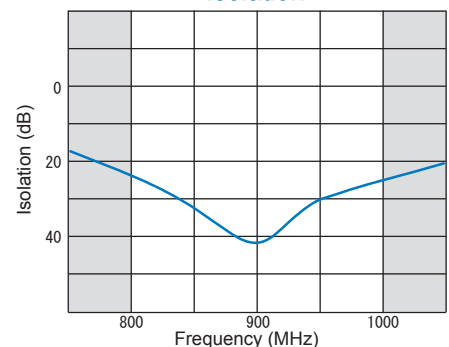

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

## R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan  
Tel : +81-545-31-2600 E-mail : info@rkco.jp  
Fax : +81-545-31-1600 URL : http://rk-microwave.com