


R&K-GA402M602-3737R



OUTLINE DRAWING

※IN MILLIMETERS

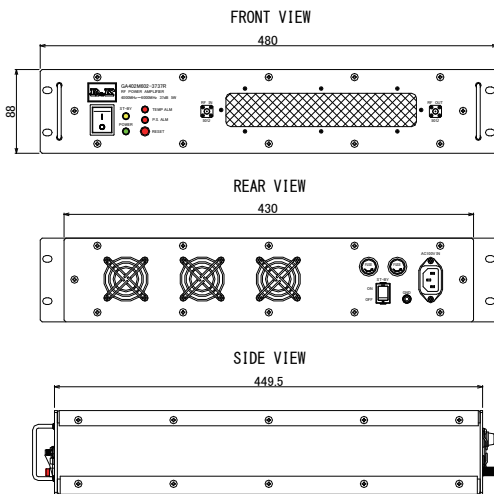

- Class A Linear Solid-State Amplifier
- Broadband Frequency: 4000MHz ~ 6000MHz
- Output Power (CW) : 5W (min.) @1dB Comp.
- With Output Circulator


APPLICATION

- EMC(Electromagnetic Compatibility)
- Accelerator Application
- Telecommunication Test and Measurement Application
- Etc...

SPECIFICATIONS @ +25°C

Frequency Range	: 4000MHz ~ 6000MHz
Small Signal Gain	: +37.0dB (min.)
Gain Flatness	: ±2.0dB (max.)
Output Power (CW)	: 5W (min.) @1dB Comp.
Operation Mode	: Class A
Output I.C.P.	: +47.0dBm (typ.)
Harmonics	: -18.0dBc (max.) @Po=5W
Spurious	: -70.0dBc (max.) @Po=5W
Impedance	: 50Ω
Input Return Loss	: 9.5dB (min.) / VSWR : 2.0 (max.)
Output Return Loss	: 11.0dB (min.) / VSWR : 1.8 (max.)
Maximum RF Input Power	: +5.0dBm
AC Supply Input	: AC100V±10%/1φ, 50/60Hz, 120VA Δ1
Operating Temperature	: 0°C to +40°C
Storage Temperature	: -15°C to +65°C
Connectors	: RF - IN SMA - FEMALE RF - OUT SMA - FEMALE
Size	: (W)480mm×(D)449.5mm×(H)88mm(EIA:2U)
Weight	: 10.0kg (max.)
Cooling	: Forced Air Cooling
Protection Circuits	: Over Temperature Protection Voltage Abnormality Protection
Other Function	: With Output Circulator

TYPICAL PERFORMANCE (Temp @+25°C)

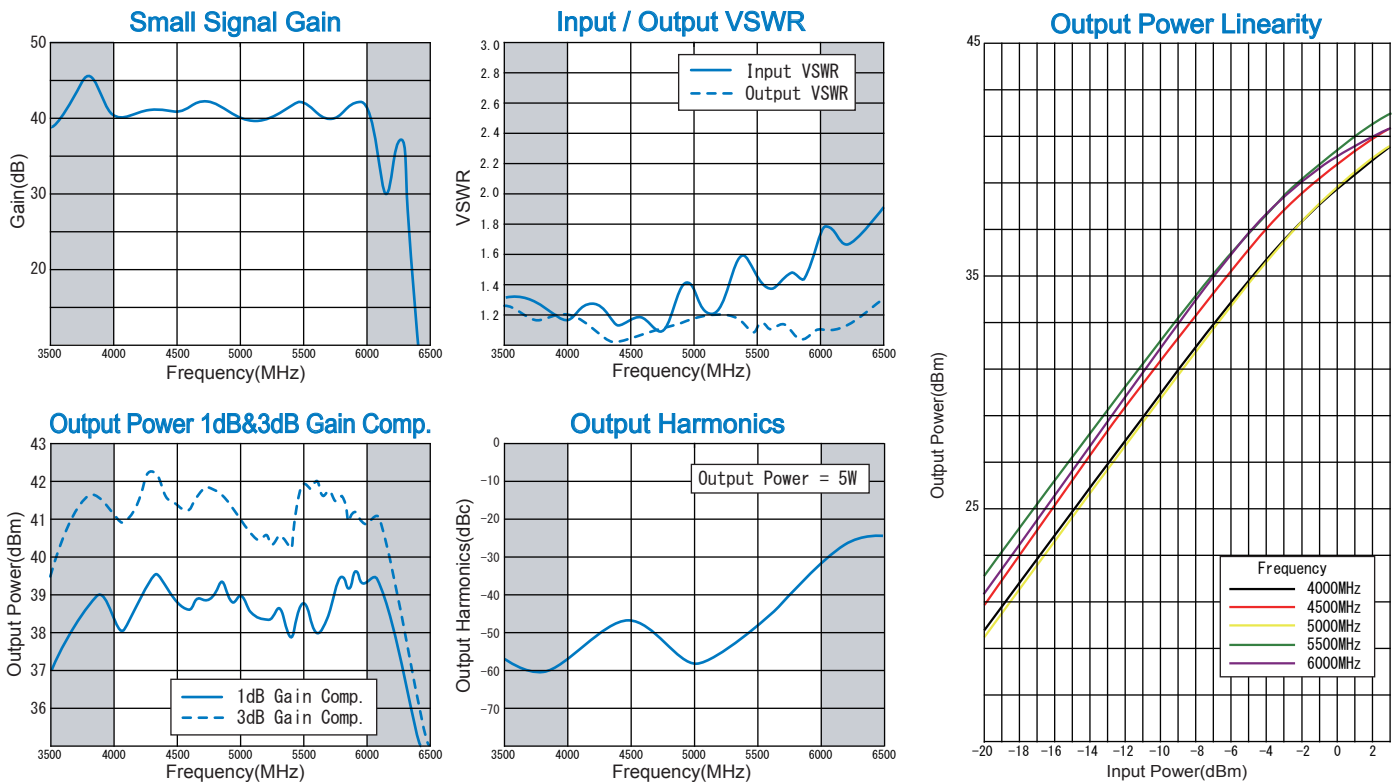

* CHANGE Δ1 9/May./2019

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, the export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
 Tel : +81-545-31-2600 E-mail : info@rkco.jp
 Fax : +81-545-31-1600 URL : http://rk-microwave.com