

# RF POWER AMPLIFIER




## R&K-GA0827-4552-R



### OUTLINE DRAWING

※IN MILLIMETERS

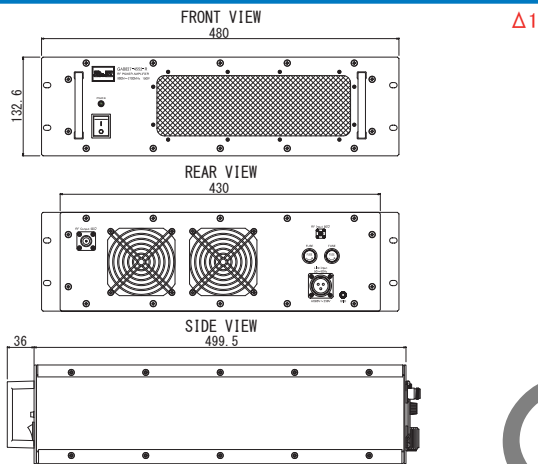

- Ultra Wide Band Power Amplifier
- Broadband Frequency: 800MHz~2700MHz
- Output Power (CW) : 150W (min.) @Psat.


### APPLICATION

- EMC(Electromagnetic Compatibility)
- Accelerator Application
- Telecommunication Test and Measurement Application
- Etc...

### SPECIFICATIONS @ +25°C

Frequency Range	: 800MHz ~ 2700MHz
Small Signal Gain	: +45.0dB (typ.)
Gain Flatness	: ±2.0dB (max.)
Output Power (CW)	: 100W (typ.) @3dB Comp. Δ2
	: 150W (typ.) @Psat. Δ2
Impedance	: 50Ω
Input Return Loss	: ≤ -10dB (typ.)
Output Return Loss	: ≤ -10dB (typ.)
Maximum RF Input Power	: +10.0dBm
AC Supply Input	: AC85~250V / 1φ, 50/60Hz, 1.2kVA
Operating Temperature	: -10°C to +45°C
Storage Temperature	: -15°C to +65°C
Connectors	: RF-IN SMA-FEMALE @REAR PANEL RF-OUT N-FEMALE @REAR PANEL
Size	: (W)480mm×(D)500mm×(H)133mm(EIA:3U)
Cooling	: Forced Air Cooling
Protection Circuits	: Over Temperature Protection

### TYPICAL PERFORMANCE (Temp @+25°C)

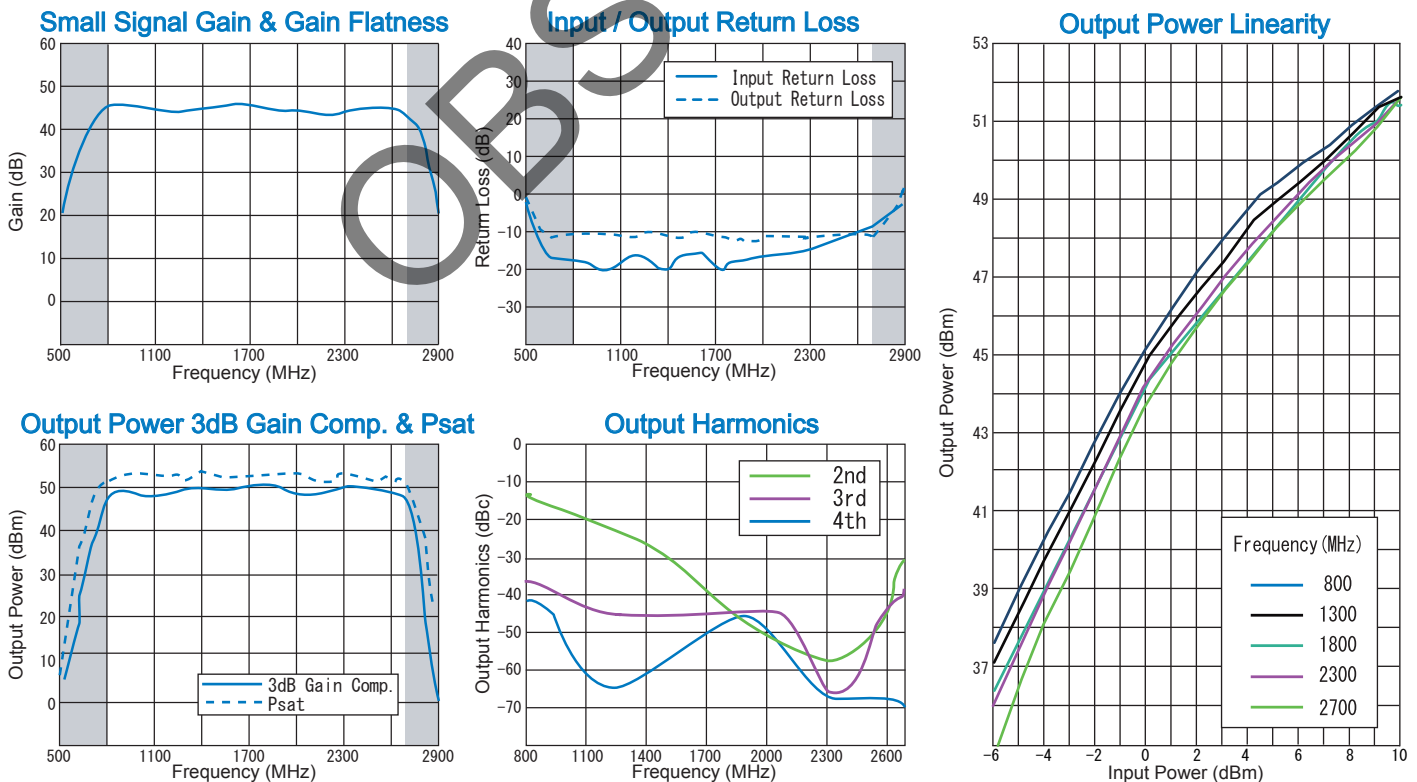

\* CHANGE Δ1 29/Oct./2015 Δ2 14/May/2015

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, The export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

## R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan  
Tel: +81-545-31-2600 E-mail: info@rkco.jp  
Fax: +81-545-31-1600 URL: http://rk-microwave.com