

SMALL SIGNAL AMPLIFIER




Ver.2.0 : 2020.04.01

R&K-AA200-0S



OUTLINE DRAWING

※IN MILLIMETERS

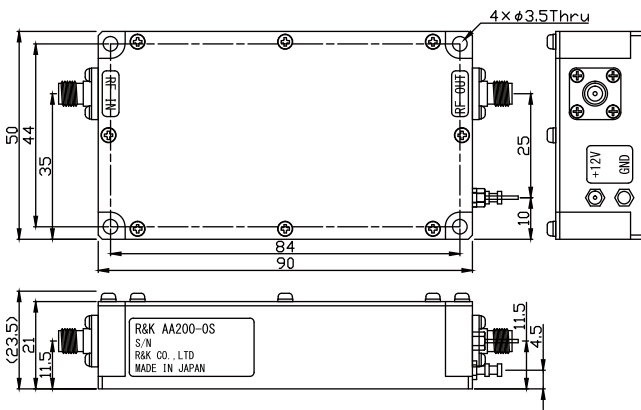

- Broadband Frequency : 50MHz~3000MHz
- Output Power : +35dBm @2GHz
- Small Signal Gain : +27dB (typ.) @2GHz
- Low Cost
- RoHS Compliance

SPECIFICATIONS

| | |
|---|--|
| Frequency Range | : 50MHz ~ 3000MHz |
| Small Signal Gain | : +27dB (typ.) @2GHz : +25dB (min.) |
| Gain Flatness | : ±2.0dB (max.) |
| Output Power@1dB Comp. | : +35dBm (min.) @2GHz |
| Output I.C.P. | : +45dBm (typ.) @2GHz |
| Noise Figure | : 8.0dB (max.) |
| Impedance | : 50 Ω |
| Input Return Loss | : 10dB (typ.) |
| Output Return Loss | : 6dB (typ.) |
| DC Supply Input | : +12V ±0.5V : 1800mA (max.) |
| Maximum RF Input Power | : +13dBm |
| Operating Temperature (@Base Plate Temp.) | : -20°C to +60°C |
| Storage Temperature | : -20°C to +80°C |
| Connectors (Standard) | : SMA-FEMALE |
| (Option) | : BNC-FEMALE : N-FEMALE |
| Weight (AA200-0S) | : 165g (typ.) |


HOW TO ORDER

Model Name
R&K-AA200-0S


- S = SMA-FEMALE
- B = BNC-FEMALE
(BNC Operational to 1GHz)
- N = N-FEMALE
- 0 = Module
- 1 = With Heatsink & Fan

TYPICAL PERFORMANCE (Temp @+25°C)


Small Signal Gain & Gain Flatness Input & Output Return Loss

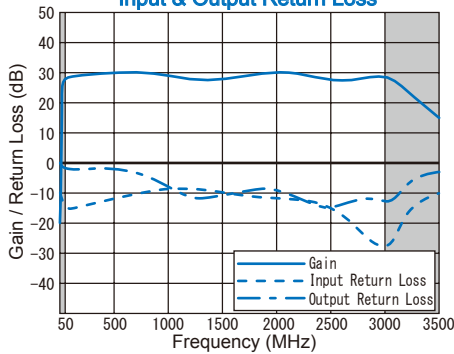


Noise Figure

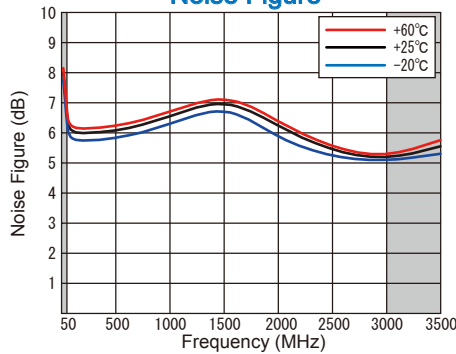


SCHEMATIC

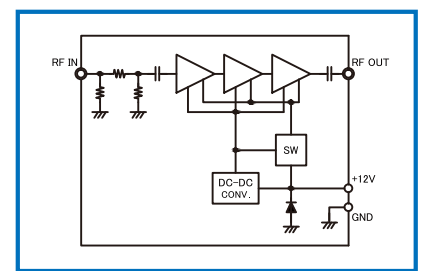


Output Power 1dB & 3dB Comp. Output 3rd Order Intercept Point

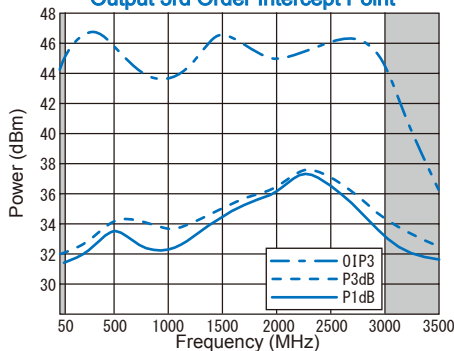

Pulse Characteristics

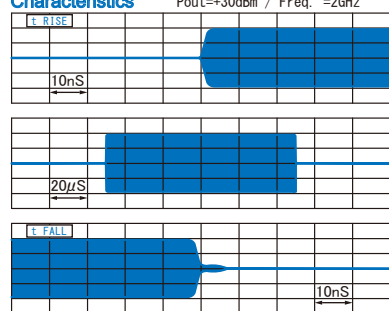

Input vs Output Linearity

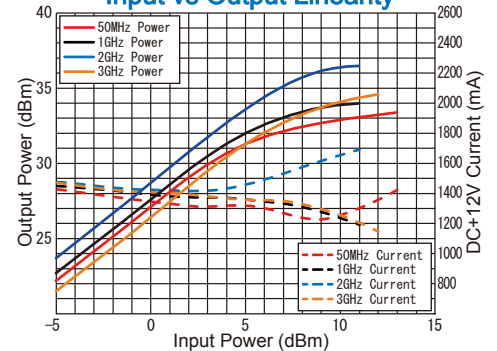

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, the export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
Tel : +81-545-31-2600 E-mail : info@rkco.jp
Fax : +81-545-31-1600 URL : http://rk-microwave.com

R&K-AA200-0S

Revision history

| Date | Version Number | Detailed contents of the change. |
|------------|----------------|--|
| 2008/11/25 | 1.0 | First edition issued. |
| 2020/04/01 | 2.0 | Outline drawing change. Specifications change. - Output I. C. P. : +44dBm (typ.) @2GHz ⇒ +45dBm (typ.) @2GHz - Noise Figure : 10.0dB (max.) ⇒ 8.0dB (max.) - DC Supply Input : +12V ±0.5V, 1.6A (max.) ⇒ +12V ±0.5V, 1800mA (max.) - Maximum RF Input Power : +15dBm ⇒ +13dBm - Weight : 170g (typ.) ⇒ 165g (typ.) |

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, the export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
 Tel : +81-545-31-2600 E-mail : info@rkco.jp
 Fax : +81-545-31-1600 URL : http://rk-microwave.com