SMALL SIGNAL AMPLIFIER

R&K-AA400-0S

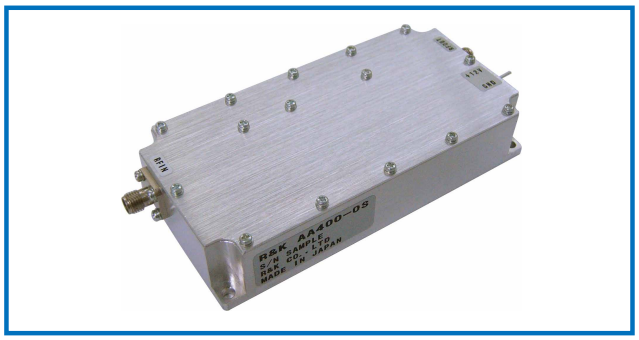

- Broadband Frequency : 500MHz～4000MHz
- Output Power : +33dBm @3GHz
- Gain Flatness : ±2.0dB (max.)
- Low Cost
- RoHS Compliance

SPECIFICATIONS

Frequency Range	: 500MHz ~ 4000MHz
Small Signal Gain	: +30dB (typ.) @3GHz
	: +28dB (min.)
Gain Flatness	: ±2.0dB (max.)
Output Power@1dB Comp.	: +33dBm (min.) @3GHz
Output I.C.P.	: +44dBm (typ.) @3GHz
Noise Figure	: 10.0dB (max.)
Impedance	: 50Ω
Input VSWR	: 2.5 : 1 (typ.)
Output VSWR	: 3.0 : 1 (typ.)
DC Supply Input	: +12V ±0.5V
	: 1.8A (max.)
Maximum RF Input Power	: +10dBm
Operating Temperature (@Base Plate Temp.)	: −20℃ to +60℃
Storage Temperature	: −20℃ to +80℃
Connectors (Standard)	: SMA-FEMALE
Connectors (Option)	: N-FEMALE
Weight (Standard)	: 240g (typ.)

OUTLINE DRAWING

※IN MILLIMETERS

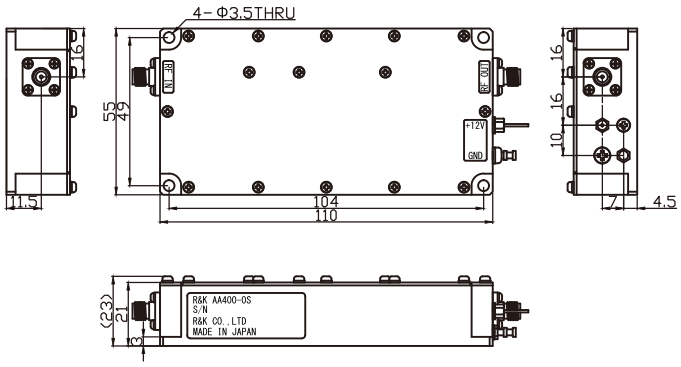

Base plate must be grounded and mounted to heat sink to guarantee operation up to maximum temperature.

HOW TO ORDER

Model Name
R&K-AA400-0S

- S = SMA-FEMALE
- N = N-FEMALE

- 0 = Module
- 1 = With Heatsink & Fan

TYPICAL PERFORMANCE

Small Signal Gain & Gain Flatness

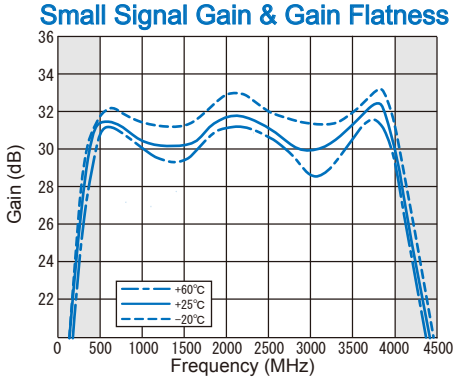

Input / Output VSWR

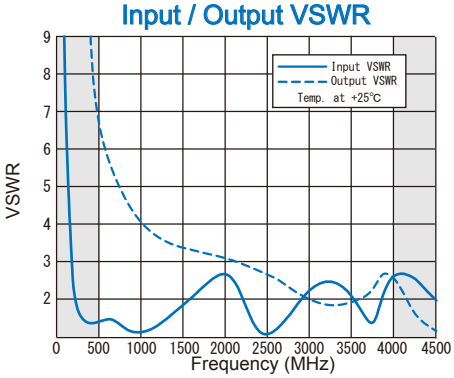

SCHEMATIC

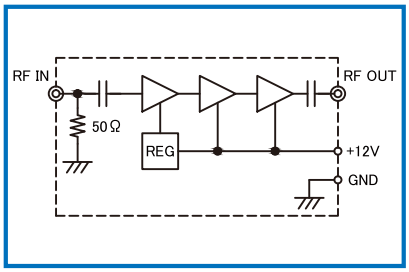

Output Power 1dB Gain Comp.

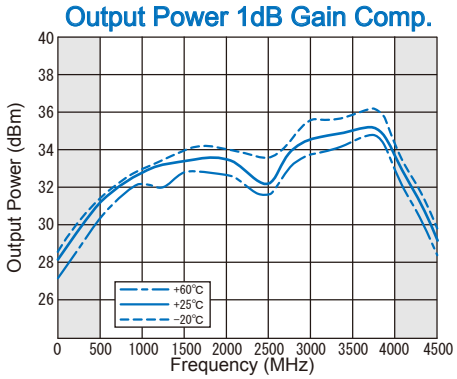

Output Power 3dB Gain Comp.

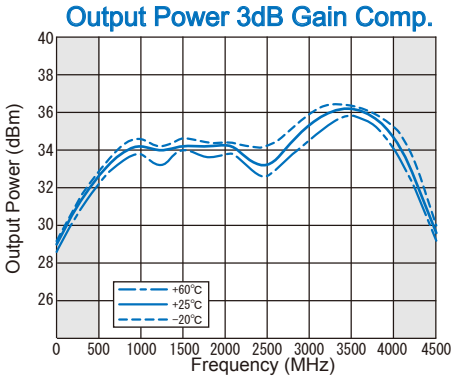

Noise Figure

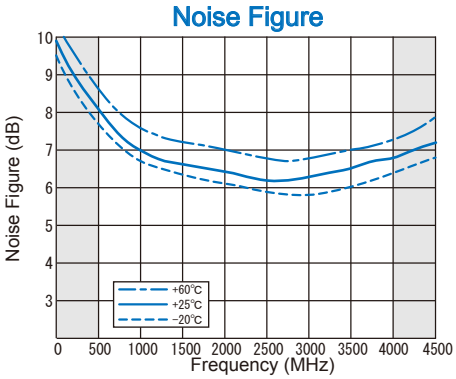

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, the export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited
721-1 Maeda,Fuji-City,Shizuoka-Pref.416-8577 Japan
Tel : +81-545-31-2600 E-mail : info@rkco.jp
Fax : +81-545-31-1600 URL : http://rk-microwave.com