


## R&K-AA160-0S



### OUTLINE DRAWING

※IN MILLIMETERS

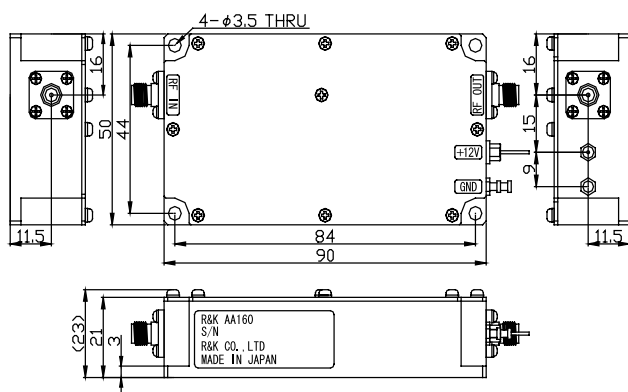

- Broadband Frequency : 2 ~ 3000MHz
- Output Power : +25dBm @2GHz
- Gain Flatness :  $\pm 1.5$ dB (max.)
- Low Cost
- RoHS Compliance

### SPECIFICATIONS



Frequency Range	: 2 - 3000MHz
Small Signal Gain	: +27dB (typ.) @2GHz : +25dB (min.)
Gain Flatness	: $\pm 1.5$ dB (max.)
Output Power@1dB Comp.	: +25dBm (min.) @2GHz
Output I.C.P.	: +37dBm (typ.) @2GHz
Noise Figure	: 8.5dB (max.)
Impedance	: 50 $\Omega$
Input VSWR	: 1.7 : 1 (typ.)
Output VSWR	: 2.0 : 1 (typ.)
DC Supply Input	: +12V $\pm 0.5$ V : 475mA (max.)
Maximum RF Input Power	: +5dBm
Operating Temperature (@Base Plate Temp.)	: -20°C to +60°C
Storage Temperature	: -20°C to +80°C
Connectors (Standard)	: SMA-FEMALE
Connectors (Option)	: BNC-FEMALE : N-FEMALE
Weight (SMA Connector)	: 175g (typ.)

### HOW TO ORDER




Model Name  
R&K-AA160-0S

S = SMA - FEMALE  
B = BNC - FEMALE  
(BNC Operational to 1GHz)  
N = N - FEMALE  
  
0 = Module  
1 = With Heat Sink

### TYPICAL PERFORMANCE (Temp @+25°C)

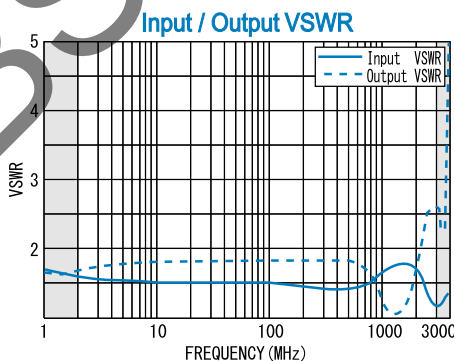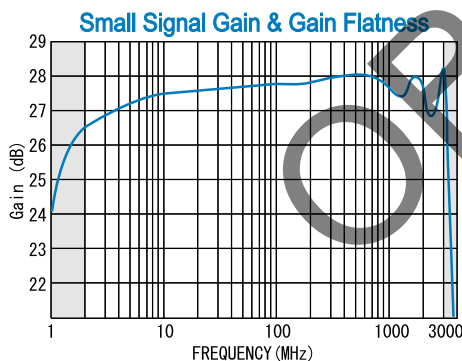

### SCHEMATIC

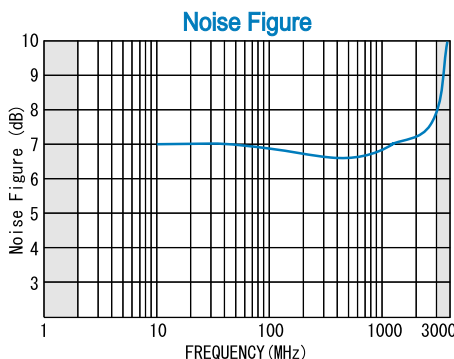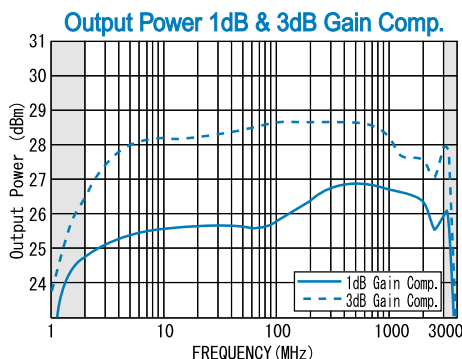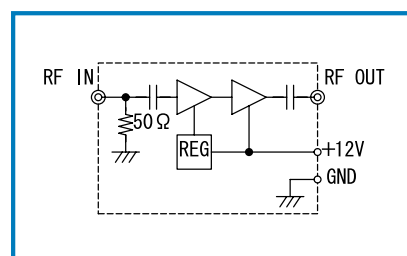

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

**R&K Company Limited**

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan  
Tel: +81-545-31-2600 E-mail: info@rkco.jp  
Fax: +81-545-31-1600 URL: http://rk-microwave.com