


LOW NOISE AMPLIFIER

MODEL ; R&K-LA1010-RS

SPECIFICATIONS

Frequency Range	; 500 – 8000MHz
Small Signal Gain	; +33dB (typ.) @2GHz ; +30dB (min.)
Gain Flatness	; ±2.5dB (max.)
Output Power@1dB Comp.	; +14dBm (min.) @2GHz
Output I.C.P.	; +27dBm (typ.) @2GHz
Noise Figure @+25°C	; 2.5dB (typ.)
-15°C to +45°C	; 3.5dB (max.)
Impedance	; 50 Ω
Input Return Loss	; 10dB (typ.)
Output Return Loss	; 10dB (typ.)
AC Supply Input	; AC90~240V / 50~60Hz ; 10VA (max.)
Maximum RF Input Power	; -5dBm
Operating Temperature	; -15°C to +45°C
Storage Temperature	; -15°C to +65°C
Connectors (In/Out)	; SMA-FEMALE
Weight	; 3.0kg (max.)

OUTLINE DRAWING

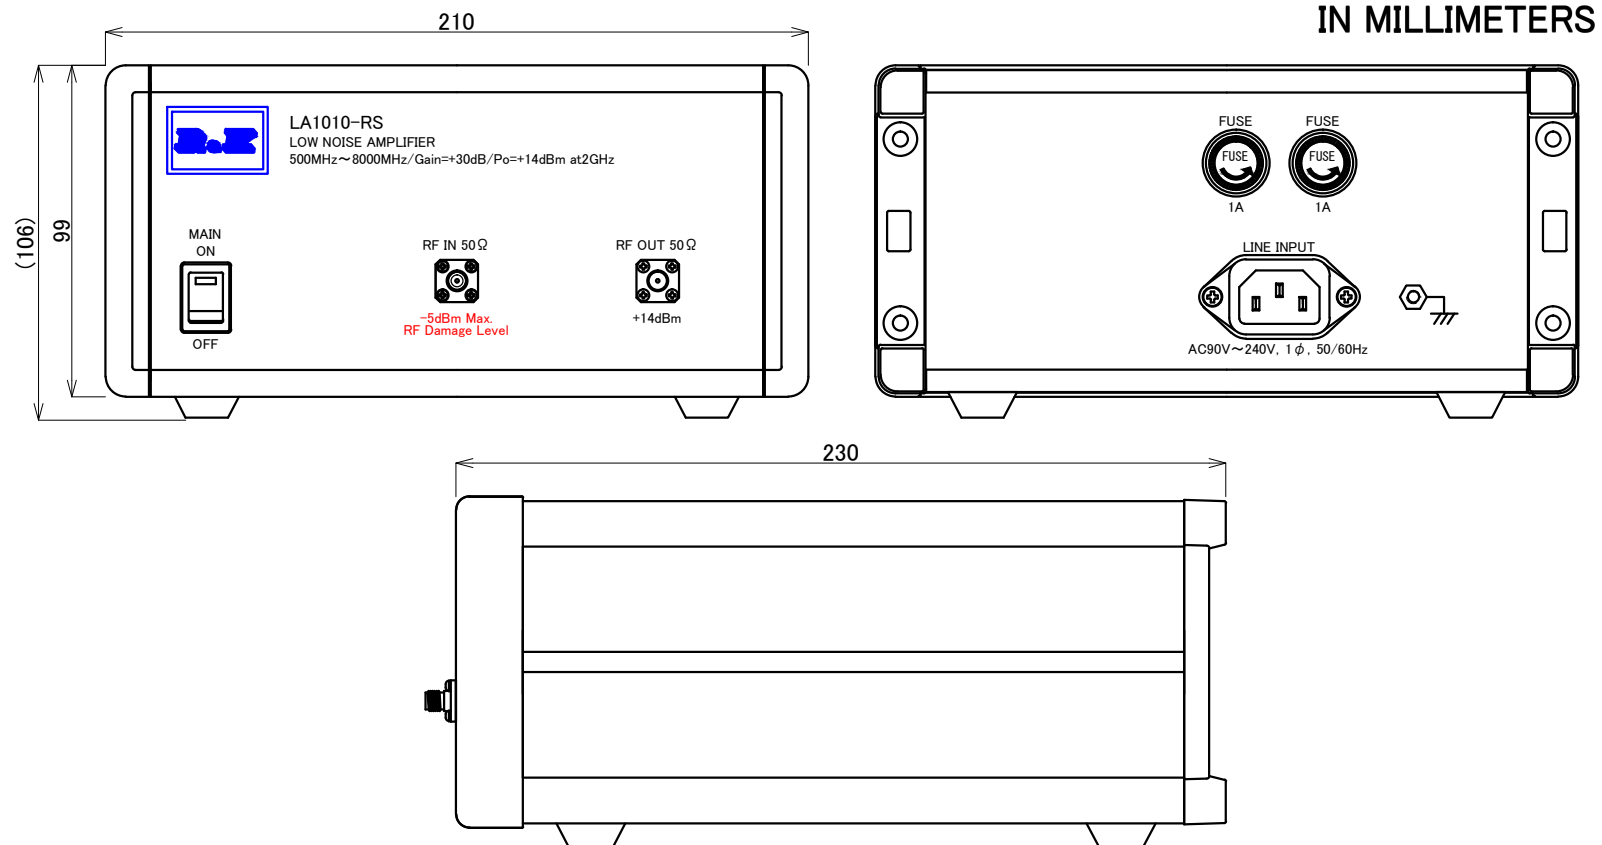

NOTE ; Specifications subject to change without notice.

Revision History

No	Date	Details	Approved
00	2018/01/24	Original Issue	Tomotaka
01	2019/11/05	Outline Drawing Changes	Yoshikazu

R&K		株式会社 アールアンドケー	
三 角 法	縮尺 SCALE	単位 UNIT	作成年月日 DRAWN
/	mm	inch	2018/1/24
検認 APPROVED	照査 CHECKED	設計 DESIGNED	作成 DRAWN
Masahiko Suzuki	Masahiko Suzuki	Masahiko Suzuki	Susumu Tomotaka

LA1010-RS

SPECIFICATION

EK-20-1224-X-01

Information disclosed in this document is intended for the sole use of, and distribution by, R&K Company Limited, for purposes of documentation, design, and purchasing. R&K Company Limited reserves all design and proprietary rights to this document, and it may not be used for purposes other than those approved by R&K Company Limited.