


MECHANICAL STEP ATTENUATOR




R&K-PT020-0S

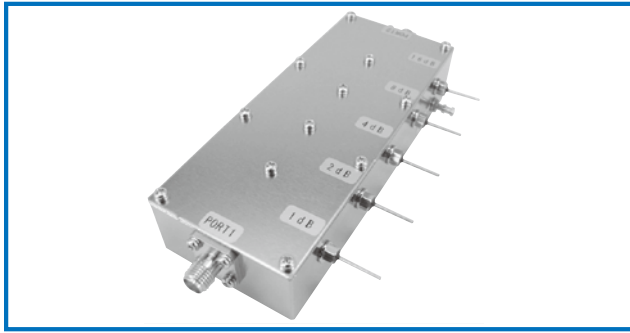

OUTLINE DRAWING

※IN MILLIMETERS

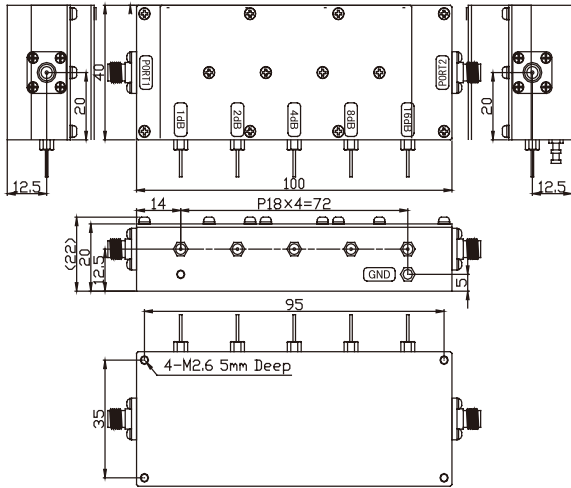

- Broadband Frequency : DC ~ 5500MHz
- Attenuation : 1dB Step/5Bit/31dB
- Low Cost
- RoHS Compliance


SPECIFICATIONS

Frequency Range	: DC - 5500MHz
Insertion Loss (DC-3GHz)	: 2.5dB (max.)
	(3GHz- 5.5GHz) : 3.5dB (max.)
Attenuation Range / Steps	: 31dB / 1,2,4,8,16dB
Attenuation Accuracy	
	(DC-3GHz) : ±0.5dB (max.)
	(3GHz-5.5GHz) : ±1.5dB (max.)
Impedance	: 50Ω
Input /Output VSWR	: 1.3 : 1 (typ.)
Logic Input (DC Drive)	: +5V = Att Setting / 0V = Zero Setting
	(TTL Drive/Option-1): High = Att Setting / Low = Zero Setting
	(TTL Drive/Option-2): High = Zero Setting / Low = Att Setting
Switching Speed	: 5ms (max.) tRise / tFall
DC Supply Input	: +5V ± 0.2V
	: 60mA (max.) / Each Step
	(Option -1X or -2X) : 80mA (max.) / Each Step
Maximum RF Input Power	: +24dBm
Operating Temperature	: -20°C to +60°C
Storage Temperature	: -20°C to +80°C
Connectors (Standard)	: SMA-FEMALE
Connectors (Option)	: N-FEMALE
Weight (PT020-0S)	: 190g (typ.)

HOW TO ORDER (Connector Option)

Model Name	S = SMA - FEMALE
PT020-0S	N = N - FEMALE
	0 = DC Drive
	1 = TTL Drive(Normal)
	2 = TTL Drive(Invert)

TYPICAL PERFORMANCE (Temp @ +25°C)

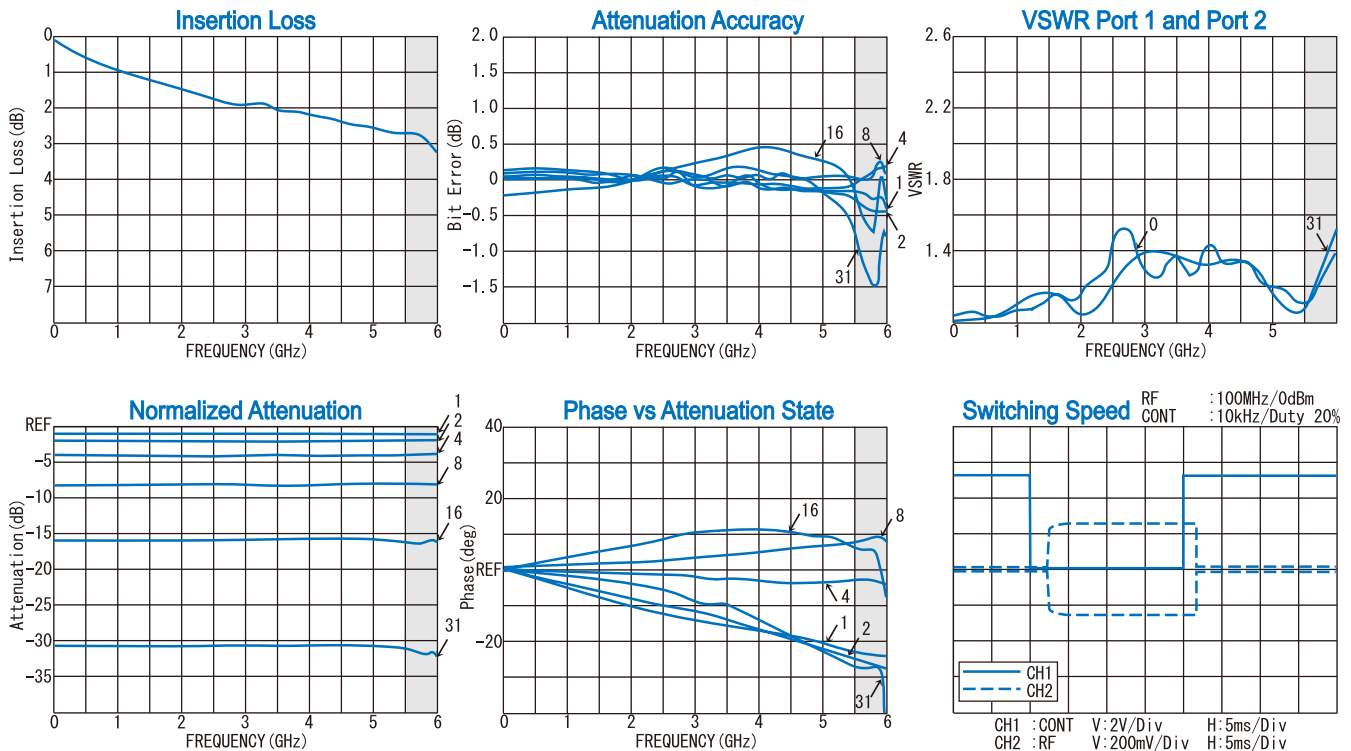

* Rev. 1.2 : 24/Jun./2020

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
 Tel : +81-545-31-2600 E-mail : info@rkco.jp
 Fax : +81-545-31-1600 URL : http://rk-microwave.com