


# DOUBLE BALANCED MIXER




## R&K-MDH510

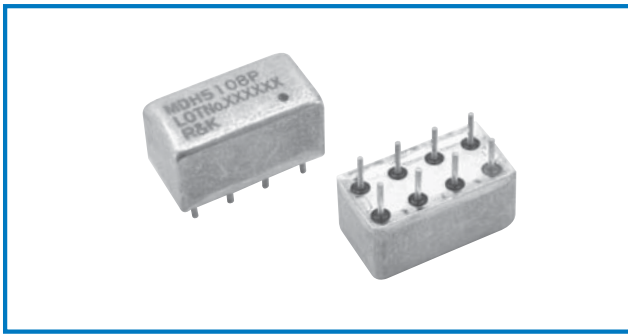

### OUTLINE DRAWING

※ IN MILLIMETERS

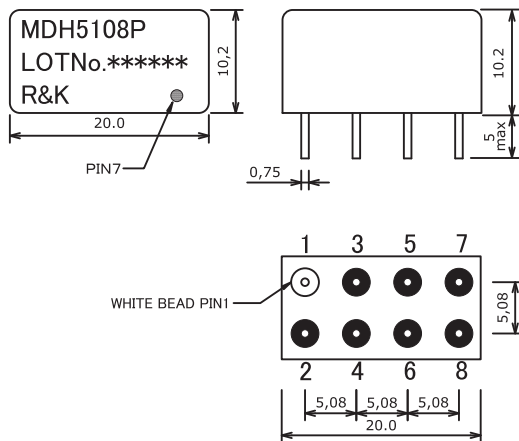

- Frequency : DC-1000MHz
- High LO Drive Level : +17dBm
- Low Cost / 8PIN Package
- RoHS Compliance

### SPECIFICATIONS

Frequency Range [LO&RF]	: 1-1000MHz		
[IF]	: DC-1000MHz		
Conversion Loss (LO Drive Level +17dBm)			
	1 - 50MHz	50 - 200MHz	200 - 1000MHz
Typ.	6.0dB	6.0dB	8.0dB
Max.	8.5dB	8.0dB	10.0dB

### Isolation (min.)



	1 - 50MHz	50 - 200MHz	200 - 1000MHz
LO - RF	45dB	35dB	25dB
LO - IF	35dB	30dB	15dB
RF - IF	25dB	20dB	10dB

- Input IP3 @Center Band : +18dBm (typ.)
- Input 1dB Comp. Point : + 8dBm (typ.)
- Impedance (All Ports) : 50Ω
- Maximum RF Input Power : 200mW
- Maximum Peak IF Current : 100mA
- Operating Temperature : -40°C to + 85°C
- Storage Temperature : -40°C to +100°C




### HOW TO ORDER

Model Name  
R&K-MDH5108P 8P=8PIN Package

### TYPICAL PERFORMANCE (Temp @+25°C)

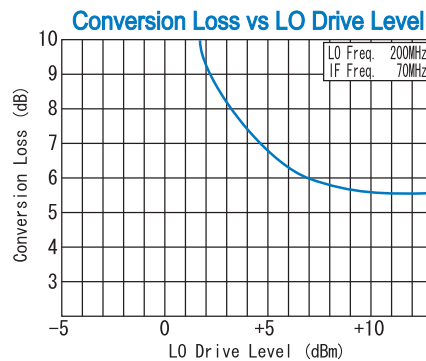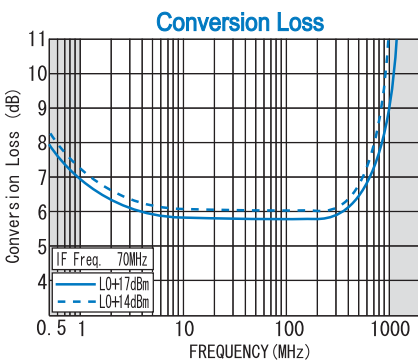

### SCHEMATIC

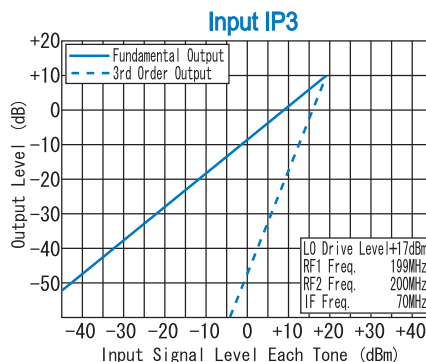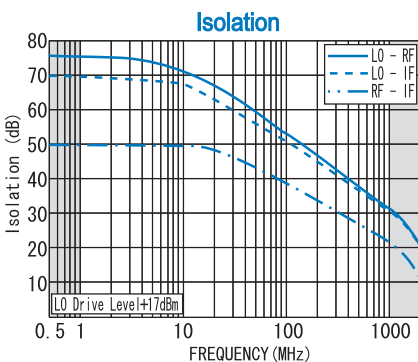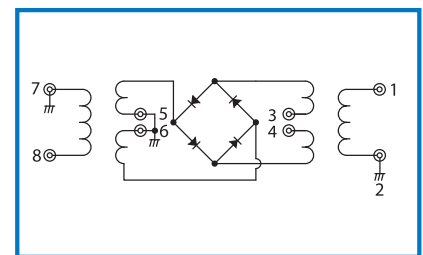

Function	Pin No.
RF	1
IF	3, 4
LO	8
GND	2, 5, 6, 7

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

## R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan  
Tel : +81-545-31-2600 E-mail : info@rkco.jp  
Fax : +81-545-31-1600 URL : http://rk-microwave.com