

RF POWER AMPLIFIER




R&K-A000110-4040-R



OUTLINE DRAWING

※IN MILLIMETERS

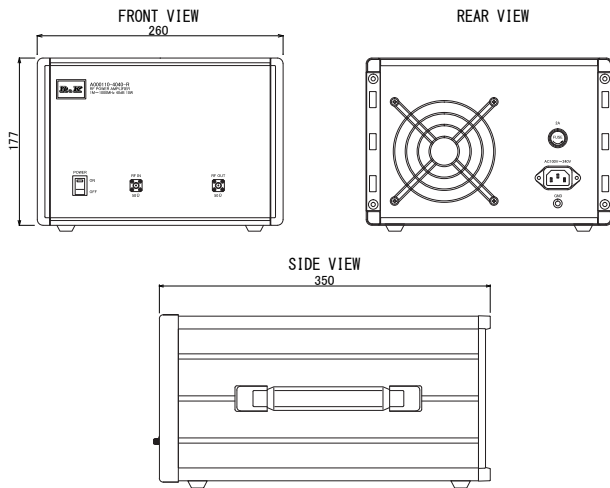

- All-Solid-State Amplifier
- Frequency Range : 1MHz~1000MHz
- Output Power : 10W(min.) @1dB Comp.


SPECIFICATIONS @ +25°C

| | |
|------------------------|---|
| Frequency Range | : 1MHz ~ 1000MHz |
| Small Signal Gain | : +40.0dB (min.) |
| Gain Flatness | : ±1.5dB (max.) |
| Output Power | : 10W (min.) @1dB Comp. |
| Output I.C.P | : +50.0dBm (typ.) |
| Noise Figure | : 10dB (typ.) |
| Harmonics | : -18.0dBc (max.) @Po=10W |
| Spurious | : -60.0dBc (max.) @Po=10W |
| Operation Mode | : Class A |
| Impedance | : 50Ω |
| Input VSWR | : 2.0 (max.) |
| Output VSWR | : 3.0 (max.) |
| AC Supply Input | : AC100V~240V/1φ, 50/60Hz, 150VA Δ1 |
| Maximum RF Input Power | : +3dBm |
| Operating Temperature | : -10°C to +45°C |
| Storage Temperature | : -15°C to +65°C |
| Connectors | : RF - IN SMA - FEMALE RF - OUT SMA - FEMALE |
| Size | : (W)260mm×(D)350mm×(H)177mm |
| Weight | : 10.0kg (max.) |
| Cooling | : Forced Air Cooling |

HOW TO ORDER

Model Number R&K-A000110-4040-R No Option

TYPICAL PERFORMANCE (Temp @+25°C)

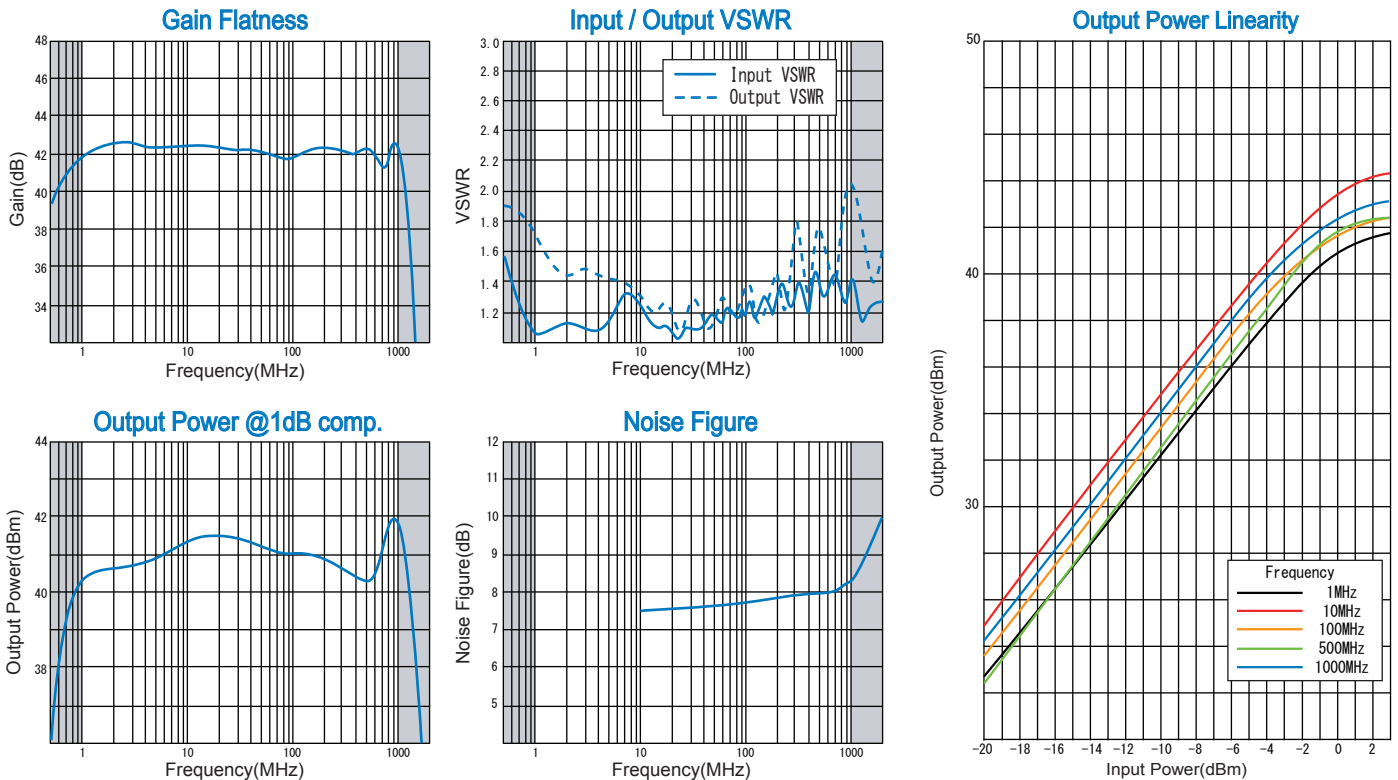

* Rev. 2 : Feb./23/2017, CHANGE Δ1 18/Jul./2018

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
 Tel: +81-545-31-2600 E-mail: info@rkco.jp
 Fax: +81-545-31-1600 URL: http://rk-microwave.com