


## R&K-TX030-ON



OUTLINE DRAWING

※ IN MILLIMETERS

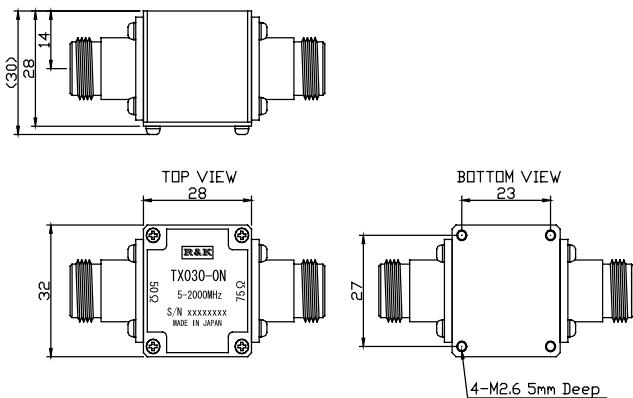

- Broadband Frequency : 5 ~ 2000MHz
- Low Insertion Loss
- 50 Ω ↔ 75 Ω Impedance Matching Trans.
- Low Cost
- RoHS Compliance


### SPECIFICATIONS

Frequency Range	: 5 - 2000MHz
Insertion Loss	: 2.5dB (max.)
Impedance (50 Ω Port)	: 50 Ω
Impedance (75 Ω Port)	: 75 Ω
VSWR (50 Ω Port)	: 1.2:1 (typ.)
Maximum RF Input Power	: +30dBm
Operating Temperature	: -40°C to + 85°C
Storage Temperature	: -40°C to +100°C
Connectors	: N-FEMALE
Weight	: 110g (typ.)



### HOW TO ORDER

Model Name  
R&K-TX030-ON No Option

### TYPICAL PERFORMANCE (Temp @+25°C)

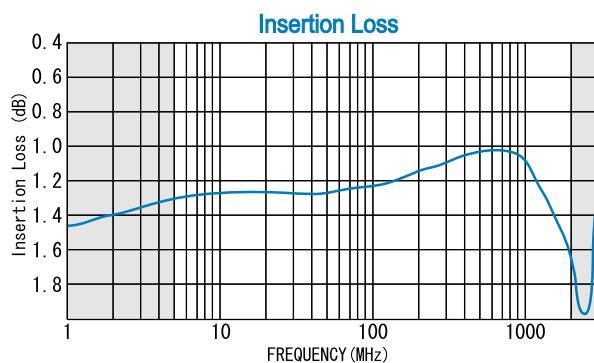

### SCHEMATIC

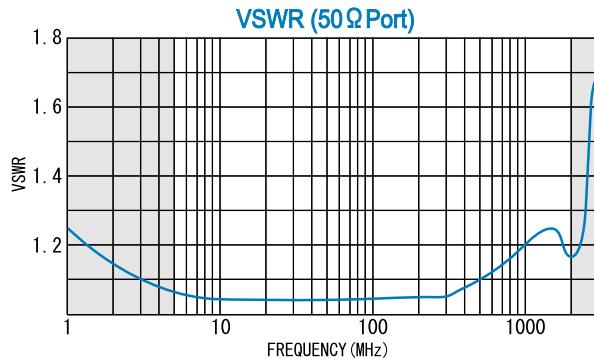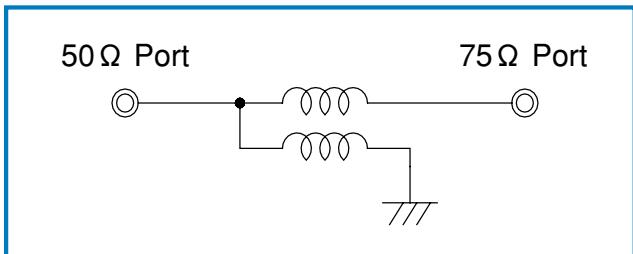

R&K reserves the right to make changes in the specifications or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

### R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan  
Tel: +81-545-31-2600 E-mail: info@rkco.jp  
Fax: +81-545-31-1600 URL: http://rk-microwave.com