# SMALL SIGNAL AMPLIFIER




### **R&K-AA260-0S**



#### **OUTLINE DRAWING**

**XIN MILLIMETERS** 

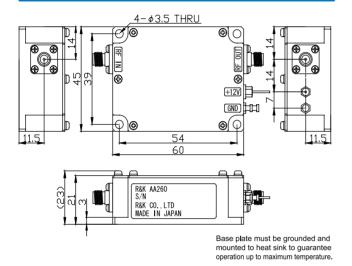

Broadband Frequency : 2000 ~ 5000MHz Output Power : +26dBm @4GHz

Gain Flatness :  $\pm 2.0$ dB (max.)

■ Low Cost

■ RoHS Compliance

#### **SPECIFICATIONS**

Frequency Range : 2000 - 5000MHz : +32dB (typ.) @4GHz Small Signal Gain : +29dB (min.) Gain Flatness : ±2.0dB (max.) Output Power@1dB Comp. : +26dBm (min.) @4GHz Output I.C.P. : +37dBm (typ.) @4GHz

Noise Figure : 5.5dB (max.)

Impedance : 50 Ω


Input VSWR : 2.0 : 1 (typ.) : 3.0 : 1 (typ.) : +12V ±1V **Output VSWR** DC Supply Input : 540mA (max.) Maximum RF Input Power : +3dBm

Operating Temperature : -20°C to +60°C


(@Base Plate Temp.) Storage Temperature : -20°C to +80°C Connectors (Standard) : SMA-FEMALE Connectors (Option) : N-FEMALE


#### HOW TO ORDER


Weight (SMÀ Connéctor)



#### TYPICAL PERFORMANCE (Temp @+25°C)

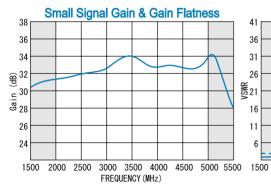


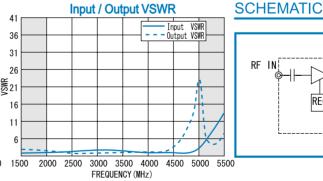



: 110g (typ.)





R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications

## R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan Tel:+81-545-31-2600 E-mail:info@rkco.jp Fax: +81-545-31-1600 URL: http://rk-microwave.com