


SMALL SIGNAL AMPLIFIER




R&K-AA420-0S

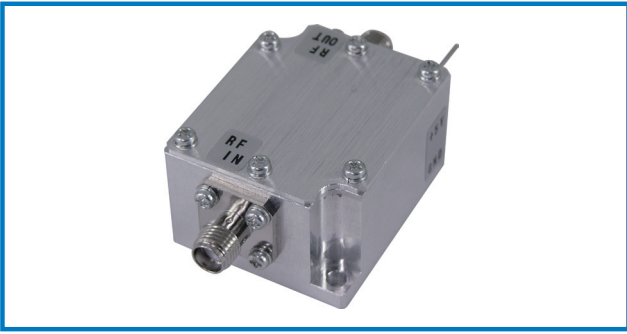

OUTLINE DRAWING

※IN MILLIMETERS

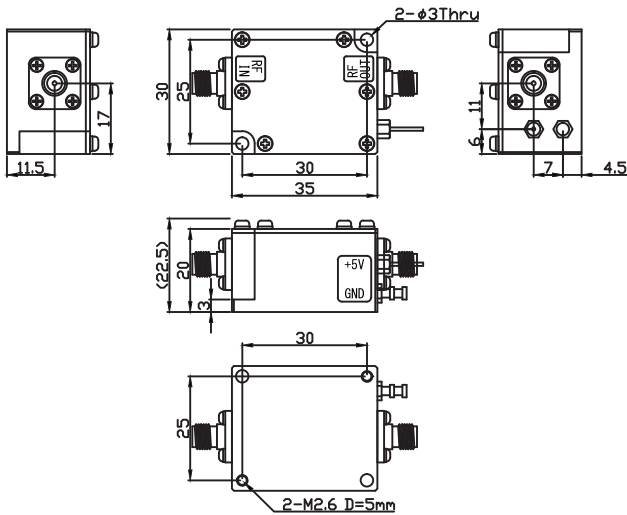

- Broadband Frequency : 100MHz ~ 8000MHz
- Output Power : +14dBm @3GHz
- Gain Flatness : ±1.0dB (max.)
- Low Cost
- RoHS Compliance

SPECIFICATIONS

Frequency Range	: 100MHz ~ 8000MHz
Small Signal Gain	: +13dB (typ.) @3GHz : +12dB (min.)
Gain Flatness	: ±1.0dB (max.)
Output Power@1dB Comp.	: +14dBm (min.) @3GHz
Output I.C.P.	: +25dBm (typ.) @3GHz
Noise Figure	: 9.0dB (max.)
Note: N.F. value is only guaranteed in the range of 100MHz - 6700MHz	
Impedance	: 50 Ω
Input VSWR	: 1.3 : 1 (typ.)
Output VSWR	: 1.5 : 1 (typ.)
DC Supply Input	: +5V ±0.2V : 60mA (max.)
Maximum RF Input Power	: +7dBm
Operating Temperature	: -20°C to +60°C
Storage Temperature	: -20°C to +80°C
Connectors (Standard)	: SMA-FEMALE
Connectors (Option)	: N-FEMALE
Weight (Standard)	: 50g (typ.)


HOW TO ORDER

Model Name
R&K-AA420-0S


S = SMA-FEMALE
N = N-FEMALE

TYPICAL PERFORMANCE


Small Signal Gain & Gain Flatness

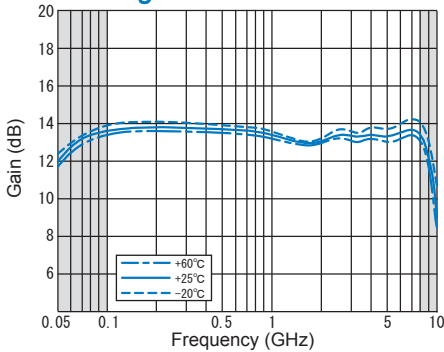


Input / Output VSWR

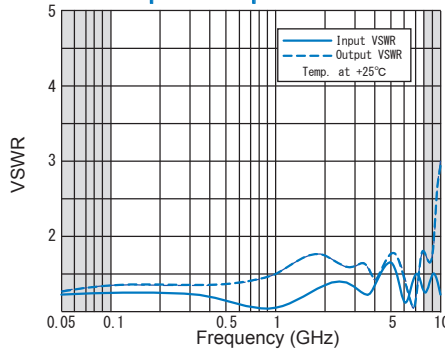


SCHEMATIC

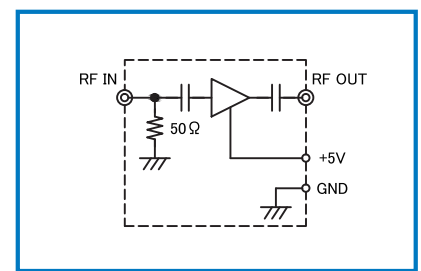


Output Power 1dB Gain Comp.

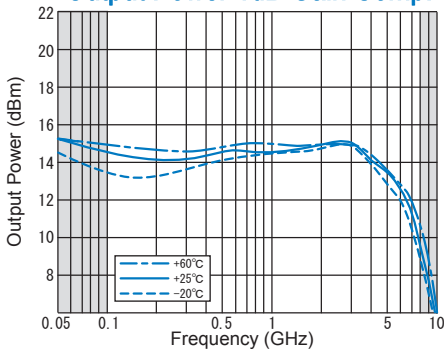

Output Power 3dB Gain Comp.

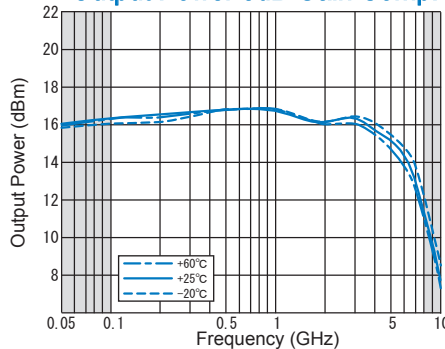

Noise Figure

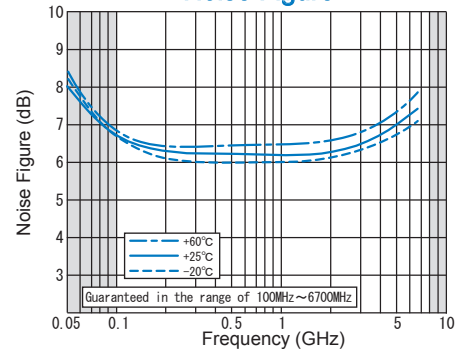

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
Tel : +81-545-31-2600 E-mail : info@rkco.jp
Fax : +81-545-31-1600 URL : http://rk-microwave.com