

R&K-A001M102-5050R



- Class A Linear Solid-State Amplifier
- Broadband Frequency : 1MHz~1000MHz
- Output Power (CW) : 100W (min.) @1dB Comp.

APPLICATION

- EMC(Electromagnetic Compatibility)
- Accelerator Application
- Telecommunication Test and Measurement Application
- Etc...

SPECIFICATIONS @ +25°C


Frequency Range	: 1MHz ~ 1000MHz
Small Signal Gain	: +50.0dB (min.)
Gain Flatness	: ±3.0dB (max.)
Output Power (CW)	: 100W (min.) @1dB Comp.
Harmonics	: -20.0dBc (max.) @Po=100W
Spurious	: -70.0dBc (max.) @Po=100W
Operation Mode	: Class A
Output I.C.P.	: +60.0dBm (typ.)
Impedance	: 50Ω
Input VSWR	: 2.0 (max.)
Output VSWR	: 3.0 (typ.) Δ1
AC Supply Input	: AC200V±15%/1φ, 50/60Hz, 2kVA
Maximum RF Input Power	: +3.0dBm
Operating Temperature	: 0°C to +40°C
Storage Temperature	: -15°C to +65°C
Connectors	: RF - IN N - FEMALE RF - OUT N - FEMALE
Size AMP. Unit	: (W)480mm×(D)649.5mm×(H)310.4mm
P.S. Unit	: (W)480mm×(D)649.5mm×(H)132.6mm Δ1
Weight	: 75.0kg (max.)
Cooling	: Forced Air Cooling
Protection Circuits	: Over Temperature Protection Power Supply Voltage Protection Output Over Power Protection Output Over Reflection Power Protection

OUTLINE DRAWING


※ IN MILLIMETERS

P.S. Unit


Δ1



AMP. Unit

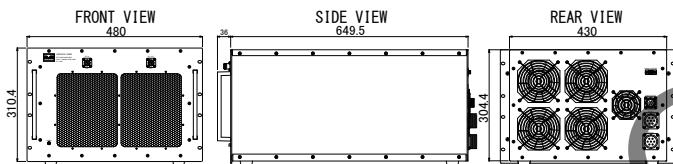

TYPICAL PERFORMANCE (Temp @+25°C)

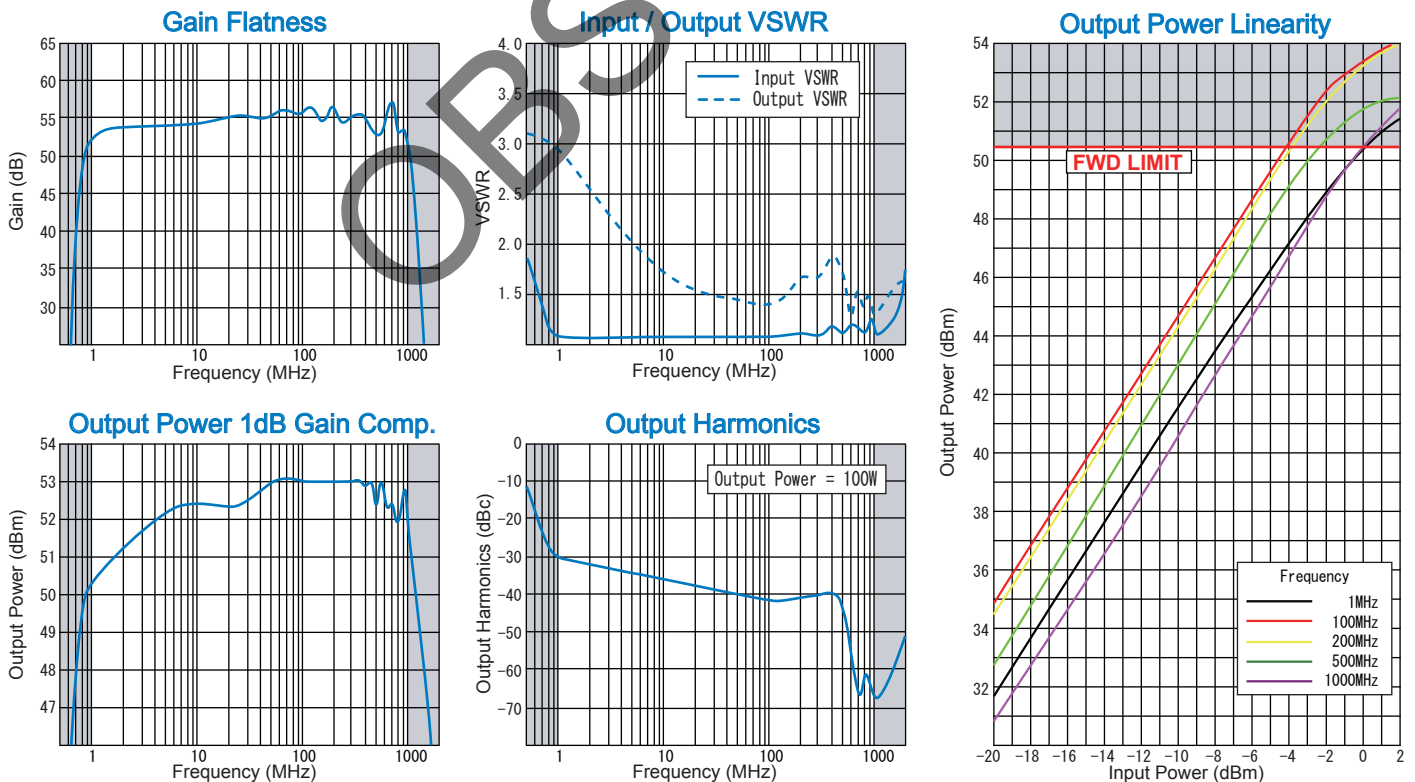

* CHANGE Δ1 Jan./23/2014

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, The export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
 Tel : +81-545-31-2600 E-mail : info@rkco.jp
 Fax : +81-545-31-1600 URL : http://rk-microwave.com