

RF POWER AMPLIFIER




R&K-A801M202-5353R



OUTLINE DRAWING

※IN MILLIMETERS

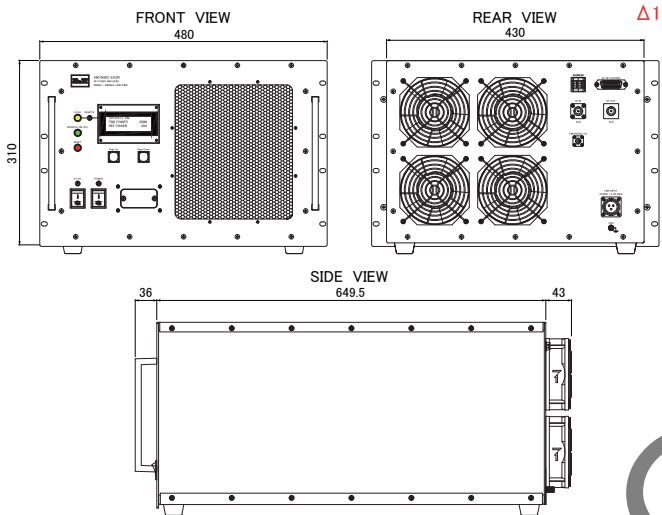

- Class A Linear Solid-State Amplifier
- Broadband Frequency: 800MHz~2000MHz
- Output Power (CW) : 200W (min.) @1dB Comp.
- With Output Circulator


APPLICATION

- EMC (Electromagnetic Compatibility)
- Accelerator Application
- Telecommunication Test and Measurement Application
- Etc...

SPECIFICATIONS @ +25°C

Frequency Range	: 800MHz ~ 2000MHz
Small Signal Gain	: +53.0dB (min.)
Gain Flatness	: ±2.0dB (max.)
Output Power (CW)	: 200W (min.) @1dB Comp.
Operation Mode	: Class A
Output I.C.P.	: +63.0dBm (typ.)
Harmonics	: -20.0dBc (max.) @Po=200W
Spurious	: -70.0dBc (max.) @Po=200W
Impedance	: 50 Ω
Input VSWR	: 2.0 (max.)
Output VSWR	: 3.0 (max.)
Maximum RF Input Power	: +3.0dBm
AC Supply Input	: AC200V ± 15% / 1 φ, 50 / 60Hz, 2.4kVA
Operating Temperature	: 0°C to +35°C
Storage Temperature	: -15°C to +65°C
Connectors	: RF-IN N-FEMALE @REAR PANEL RF-OUT N-FEMALE @REAR PANEL
Size	: (W)480mm×(D)649.5mm×(H)310mm(EIA:7U) Δ1
Weight	: 43.0kg (typ.) Δ2
Cooling	: Forced Air Cooling
Protection Circuits	: Over Temperature Protection Power Supply Voltage Protection Output Over Power Protection (@220W) Output Over Reflected Power Protection (@120W)
Remote Interface	: [Standard] GPIB (IEEE-488) [Optional] Ethernet, RS-232C
Other Functions	: R&K Multi Monitoring System Safety Interlock (EMERGENCY)

TYPICAL PERFORMANCE (Temp @+25°C)

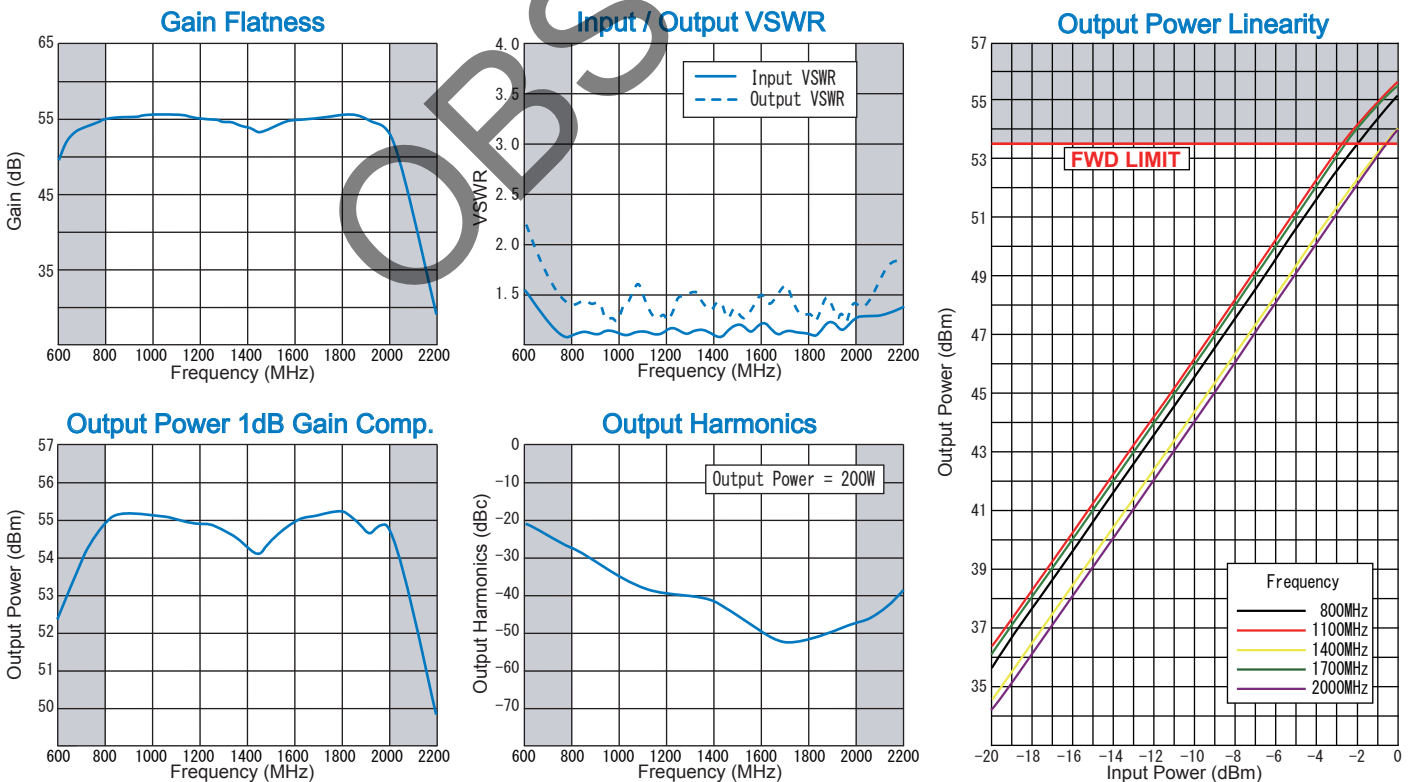

* CHANGE Δ1 12/Nov./2014 Δ2 13/Mar./2019

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, the export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
 Tel: +81-545-31-2600 E-mail: info@rkco.jp
 Fax: +81-545-31-1600 URL: http://rk-microwave.com